

PCBR-UFO

Round Illuminating Bollard



DESCRIPTION

UFO style illuminating bollard combines durability, efficiency, and versatility in a sleek design, making it ideal for pathways, landscapes, and architectural accents. Constructed with a premium powder-coated aluminum housing in dark bronze or black, it withstands demanding environments with an operating temperature range of -40°F to 140°F and robust IP65 and IK10 protection. The high-impact polycarbonate lens delivers uniform illumination with field-selectable CCTs (3000K, 4000K, 5000K) and tri-lumen outputs from 1,700 to 3,000 lumens, supported by long-life LEDs. Standard 0-10V dimming, universal 120-277V input, and integrated surge protection ensure reliable performance, while DLC Premium listing, cULus wet-location certification, and FCC compliance confirm quality and code adherence. An anchor bolt mounting kit provides secure installation, and all electronics and housing are backed by a 5-year warranty.



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE					
MODEL	HEIGHT	OUTPUT	CCT	INPUT VOLTAGE	FINISH
PCBR-UFO	42	SW	SK	UNV	BL
UFO Head Illuminating Bollard	42.25"	Selectable Power Level	Selectable Kelvin (3000K/4000K/5000K)	120-277V	Black
					DB
					Dark Bronze
					CC
					Custom RAL Color

Custom options are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

MOUNTING KIT *(Required, Ordered Separately)*

MODEL
PCBR-MK
Mounting Kit for Round Nordeon PCBR Bollards; Includes Mounting Instructions and Hardware



SELECTABLE
POWER & CCT



PCBR-UFO

Round Illuminating Bollard



PHYSICAL	HOUSING	Die-Cast Aluminum with Premium Powder Coat Finish
	LENS	High-Impact Polycarbonate
	MOUNTING	Mounted via Anchor Bolts; Mounting Kit Available Separately (PCBR-MK)
	OVERALL DIMENSIONS	Bollard ø6.3" x 42.25" Height; Light Engine ø9.76"
	WEIGHT	13.22 Pounds
	OPERATING TEMPERATURE	-40° F to 140° F
	SWITCH DEFAULTS	Default Switch Positions are Highest Power Level @ 4000K

ELECTRICAL	POWER (field selectable)	From 13.15 to 23.63 Watts
	CURRENT	See "Light Distributions" Section Below.
	VOLTAGE	Universal 120-277 AC Voltage (50-60Hz)
	DRIVER	0-10vdc Dimming Driver
	TOTAL HARMONIC DISTORTION	< 20%
	POWER FACTOR	> 0.90
	SURGE SUPPRESSION	4kV Input Transient Surge Protection

PHOTOMETRIC	LED	Field-Selectable 3000K, 4000K, and 5000K
	DELIVERED LUMEN OUTPUT	From 1725 to 3019 Delivered Lumens
	EFFICACY	From 127 to 135 Lumens per Watt
	COLOR RENDERING INDEX	> 70
	CHROMATICITY	LED color maintenance < 0.00313 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
	LUMEN MAINTENANCE*	L70 > 192,000 Hours L90 > 58,000 Hours

LIGHT DISTRIBUTIONS	MEASUREMENTS	LOW LUMENS			MID LUMENS			HIGH LUMENS		
		3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
	LUMENS	1725	1770	1784	2316	2385	2373	2927	3019	2992
	WATTS	13.32	13.15	13.47	18.19	17.86	18.31	23.52	22.96	23.63
	EFFICACY	130	135	132	127	134	130	124	131	127
	INPUT CURRENT @ 120V	0.11A	0.11A	0.11A	0.15A	0.15A	0.15A	0.20A	0.19A	0.20A
	INPUT CURRENT @ 277V	0.05A	0.05A	0.05A	0.07A	0.06A	0.07A	0.08A	0.08A	0.09A

Values reflect delivered lumens at full output.

CERTIFICATIONS	SAFETY	cULus Certified for Wet Locations
	DLC	DLC Premium Listed
	INGRESS PROTECTION	IP65
	IMPACT RATING	IK10
	CODE COMPLIANCE	Complies with FCC Part 15, Class A
	WARRANTY	Five Year Limited Warranty


*LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.

PCBR-UFO

Round Illuminating Bollard



DIMENSIONS

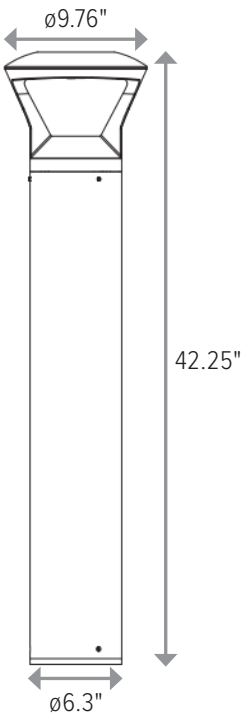

PHOTOMETRICS

Luminaire Data	
Description	UFO Bollard @ Highest Power Level, 4000K
Total Lumens	3019
Input Wattage	23
Efficacy (lm/W)	132
Max. Candela	1189.1 (292.5H, 57V)
IES Classification	Type III
Longitudinal Classification	Short

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30°	165	5.5%
0-60°	1886	62.5%
0-80°	2947	97.6%
80-90°	53	1.7%
0-90°	3000	99.3%
90-110°	9	0.3%
110-180°	0	0.0%
0-180°	3019	100%

Luminaire Classification Systems			
LCS Zone		Lumens	%Lum
FL	0-30	79	2.6%
FM	30-60	842	27.9%
FH	60-80	542	17.9%
FVH	80-90	27	0.9%
BL	0-30	86	2.9%
BM	30-60	878	29.1%
BH	60-80	519	17.2%
BVH	80-90	26	0.9%
UL	90-100	5	0.1%
UH	100-180	15	0.5%
Total		3020	100%
BUG Rating		B2-U2-G2	

